

AUTOMATIC CAPACITOR WINDING MACHINE MODEL - AWM125




Features

- ❑ High Speed winding.
- ❑ Winding for capacitance.
- ❑ Single mode (1 element/cycle) of winding producing capacitor having diameter upto 125mm .
- ❑ 3 position index arrangement, facilitates simultaneous and continuous operation.
- ❑ Hex core mandrels are driven by AC servo motor, controlled by AC servo drive with surface speed control with adjustable acceleration & de-acceleration.
- ❑ Electronic tension control with low friction cylinders for dancing rollers and AC Servo motors with drives for each feeders.
- ❑ Temperature controlled heat sealing of wound element.
- ❑ Pneumatically operated feeders for Fast loading of spools with firm gripping.
- ❑ On-line margin setting of spools.
- ❑ Automatic pre - detection and machine stoppage when spools exhausts, which will occur when spools will be left with material, for only 1 element winding.
- ❑ User friendly touch screen operator controls along with program memory (100 programs storing facility).
- ❑ Both Metallized films are demetalized during the initial and final turns of the winding.
- ❑ Automatic loading of cores to the mandrel through hopper unit.
- ❑ Minimum change parts for different core diameter & different width of winding.
- ❑ Wound elements are ejected onto the motorized conveyor automatically and thereby to collection bin.
- ❑ Safety enclosure to electrical area and operational area with limit switch interlocks for operator safety.

Technical Specification

	MPP	PP	Burn Off
Feeders	2	1	2
Roll Inner Diameter	75mm	75mm	75mm
Roll Outer Diameter	400mm	300mm	180mm
Thickness	4 - 12 microns	20- 40 microns	25- 40 microns
Winding Diameter	Min 20mm to Max 125mm.		
Winding Width	37.5 to 150 mm (1 Element) in 5 Hex Core 50 to 150 mm (1 Element) in 13 Hex Core		
Mandrel Size	5 or 13 mm Hex with change parts		
Safety Enclosure	Dust protection Enclosure for High Quality product & Safety		

Winding Configuration

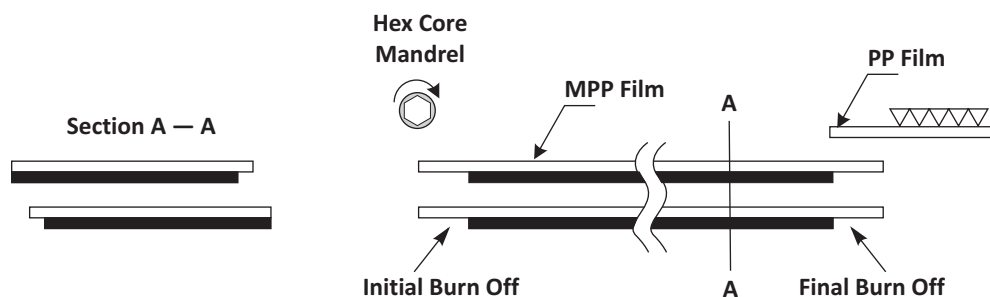

General Specification

Floor space : 1500 x 1850 x 2125 mm (W x D x H)
 Machine weight : 800 Kgs (Approx.).
 Power supply : 415/380 V AC, 50/60 Hz, 3 phase, 3 KW (Nominal).
 Air supply : Pressure - 6 Bar, Consumption - 6cfm.

NOTE: We reserve the right to modify above specifications at any time. please confirm your specification before ordering.